


INDUSTRIAL PNEUMATICS - hoses

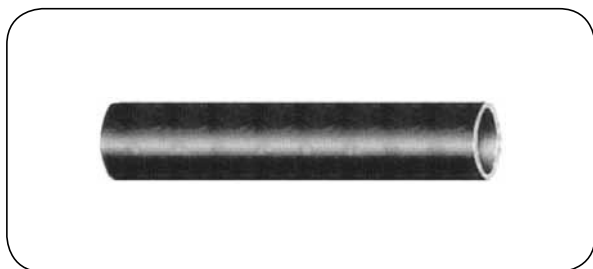

PA 12 S40-PHL

Hose material: PA 12 polyamide (Nylon)

Working temp.: From -40°C up to +80°C
(for water-based media +70°C)

Lightweight, flexible hose with calibrated outside diameter designed for pneumatic, hydraulic, fuel and oil installations, lubrication and chemicals. Available in a wide range of colours: natural, black, blue, green, red, yellow and orange. Standards - DIN 73378.

code	O.D. [mm]	I.D. [mm]	working press. 23°C [bar]	bursting press. 23°C [bar]	bending radius [mm]	standard length [m]
ZC-PA12-S40PHL-04X02	4	2	44	132	16	100
ZC-PA12-S40PHL-04X03	4	3	19	56	28	100
ZC-PA12-S40PHL-05X03	5	3	33	100	20	100
ZC-PA12-S40PHL-05X035	5	3.5	23	70	25	100
ZC-PA12-S40PHL-06X04	6	4	28	84	30	100
ZC-PA12-S40PHL-08X05	8	5	32	96	35	100
ZC-PA12-S40PHL-08X06	8	6	20	60	40	100
ZC-PA12-S40PHL-10X06	10	6	33	100	55	50
ZC-PA12-S40PHL-10X07	10	7	23	70	58	50
ZC-PA12-S40PHL-10X075	10	7.5	20	60	60	50
ZC-PA12-S40PHL-10X08	10	8	16	48	60	50
ZC-PA12-S40PHL-12X08	12	8	28	84	60	50
ZC-PA12-S40PHL-12X09	12	9	20	60	60	50
ZC-PA12-S40PHL-12X10	12	10	12	36	85	50
ZC-PA12-S40PHL-14X10	14	10	23	68	75	50
ZC-PA12-S40PHL-14X11	14	11	16	48	85	50
ZC-PA12-S40PHL-15X12	15	12	16	48	90	50
ZC-PA12-S40PHL-16X13	16	13	13	40	110	50
ZC-PA12-S40PHL-18X14	18	14	17	52	100	50
ZC-PA12-S40PHL-20X16	20	16	16	48	200	50
ZC-PA12-S40PHL-22X18	22	18	13	40	200	50